

NANO VITRIFIED TILES
600X600 MM



KHOKHANITM
CERAMIC PVT. LTD.

BLEND IN NATURE



KHOKHANI



Ivory




Art 03



Art 06



Art 13

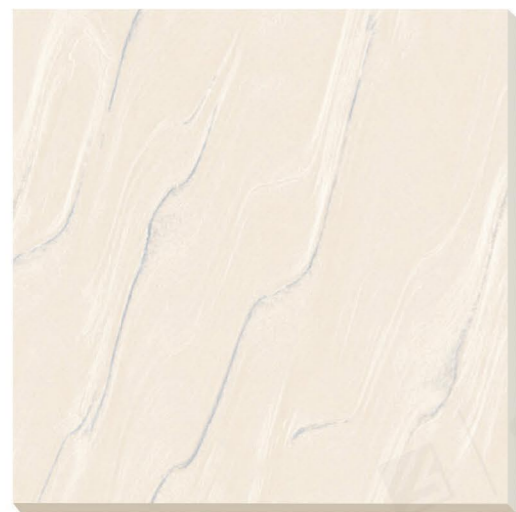

Art 14




Art 15






Art 26

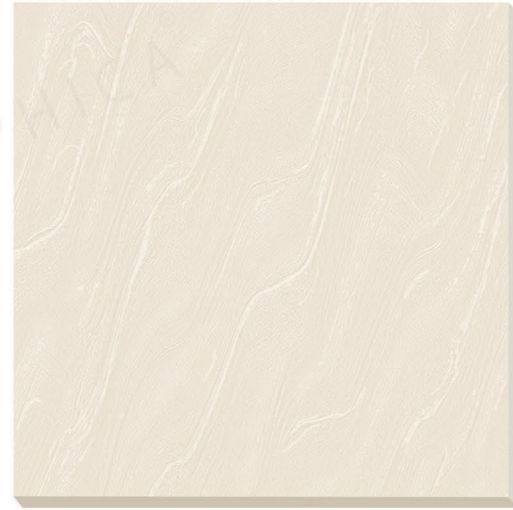

Art 28



Art 29

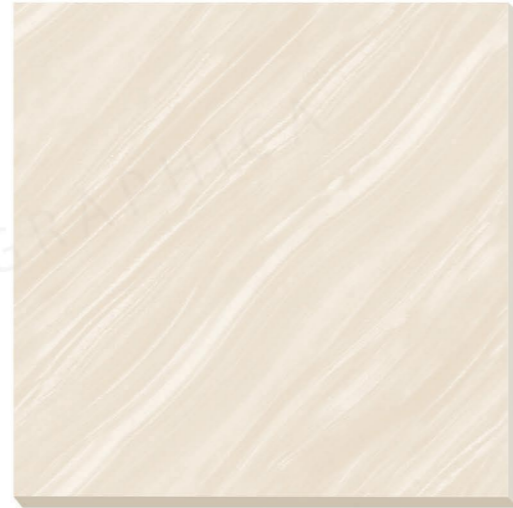

Art 30



Art 33



Art 36



Art 37



Art 38





Art 39



Art 41




Art 42



Art 43



Art 44

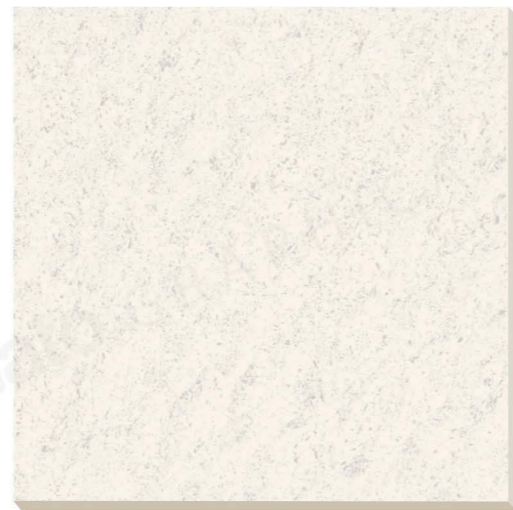

Twi 26

CLASSIC SERIES



Oak Wood



Timber Wood



Maple Wood



WOODEN SERIES




M 01



M 02



M 03

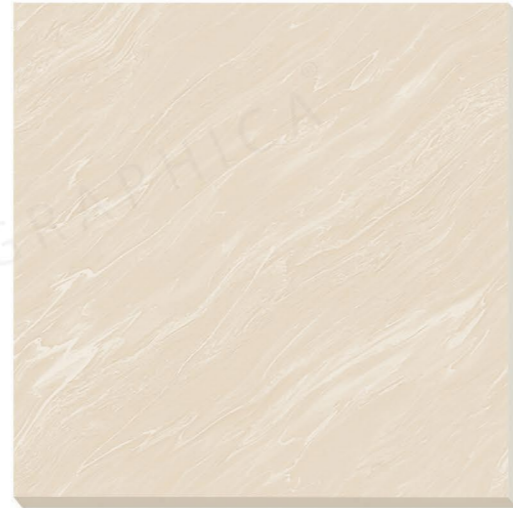

M 04



M 10



Dc 02






Jaisalmer




Terracotta



Grey

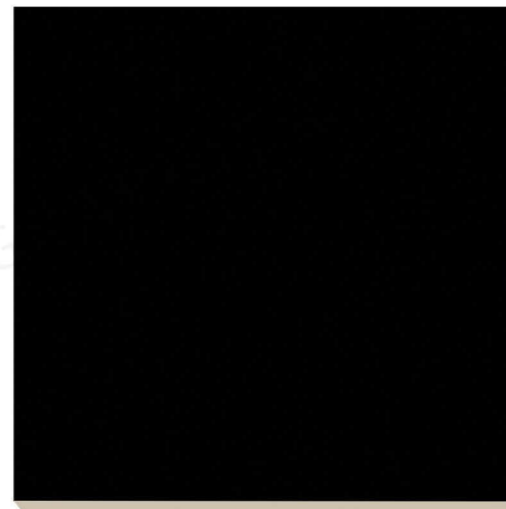

Black

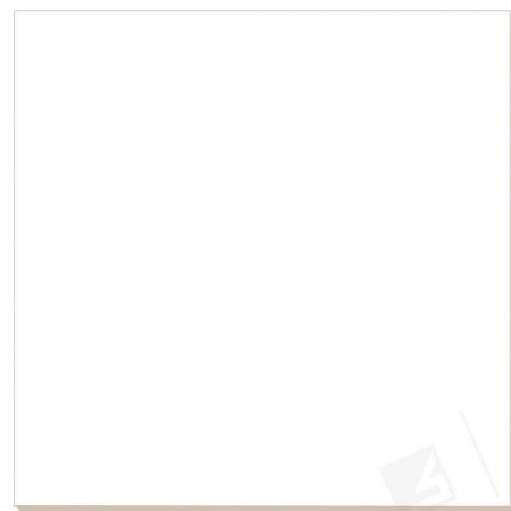

Plain White

PLAIN COLOURS

TECHNICAL SPECIFICATION

Sr. No	PROPERTY	International Std. ISO 13006/EN 176 Group Bla	OUR VALUE	Method of Testing
1.	Deviation in Length	± 0.6 %	± 0.1 %	EN 98
2.	Deviation in Thickness	± 5.0 %	± 2.0 %	EN 98
3.	Straightness of Sides	± 0.5 %	± 0.1 %	EN 98
4.	Rectangularity	± 0.6 %	± 0.2 %	EN 98
5.	Surface Flatness	± 0.5 %	± 0.2 %	EN 98
6.	Water Absorption	< 0.5 %	< 0.05 %	EN 99
7.	Mohs Hardness	> 6	> 8	EN 101
8.	Flexural Straightness	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	> 204 mm ²	> 144 mm ²	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength	1113 N	2830 N	ASTM C-648
12.	Density (g/cc)	> 2	2.4	DIN 51082
13.	Frost Resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No Damage	No Damage	EN 106
15.	Thermal Shock Resistance	No Damage	No Damage	EN 104
16.	Colour Resistance	No Damage	No Damage	DIN 51094
17.	Thermal Expansion	< 9x10 ⁻⁶	< 6x10 ⁻⁶	EN 103
18.	Stain Resistance	Resistance	Resistance	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	-	Min 80 % Reflection at 60°	Glossmeter

PACKING DETAIL

Size	Normal Thickness	No. of Tiles/Box	Coverage Area	Weight of Box
600x600mm	8.5 mm (Approx)	4 Pcs.	1.44 Sq.mt.	26 kgs. (Approx)

Note : Colours shown are as accurate as the limitations of the printing process will allow. Prospective Customers are advised to inspect a sample of the tiles before ordering. Every effort has been made to ensure the Accuracy of the information given. However, the company reserves the right to change the specifications without prior notice.

TILE LAYING INSTRUCTION

01. Plaster the surface of the floor to be tiled with smooth finish and complete the plastering and curing at least two weeks prior to tiling.
02. Before Fixing tiles, lay them out in desired and make sure that they give acceptable blend of colour phase note that certain amount of shade variation may occur in the tiles due to extreme fixing temperature. Size variation up to 0.75% and war page up to 0.5% of the dimension are allowed by all international standards for floor tiles. The Company will not accept any liability once tiles are fixed.
03. Before fixing the tiles on the floorwe strongly recommend to randomly select tiles from different boxes and lay them in the desired pattern to make sure that the pattern so formed gives an acceptable blend of color shade & size variation are inherent characteristic in manufacturing of ceramic tiles.
04. Kindly look for the arrow on the back of the tiles and follow the laying pattern as shown in bellow diagram



Please note that the company does not accept any liability in case of problem arising out of non-adherence to the above fixing instructions.

APPLICATIONS





KHOKHANITM
CERAMIC PVT. LTD.

BLEND IN NATURE



KHOKHANI CERAMIC PVT.LTD.

405, Eden Ceramic city, 8-A National High Way, At Lalpar, Morbi.

MO. 99099 72362/65 , khokhaniceramic@gmail.com

www.khokhaniceramic.com

KHOKHANI

www.khokhaniceramic.com